




DRIVEN BY PERFORMANCE

Monarch 3091

Engineered solution for gasket and seal applications.

- // Low density
- // Soft firmness
- // Broad service temperature range
- // Meets OEM specifications

www.armacell.com

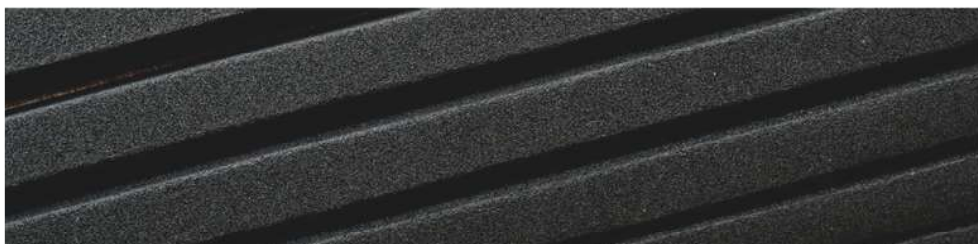

 **armacell**[®]
ArmaComp[®]

TECHNICAL DATA - MONARCH 3091

Brief description	3091 is a 100% EPDM soft, low density, foam product that meets ASTM D 1056 2A1 requirements. It is an excellent solution for outdoor applications where ozone resistance is needed or for low temperature applications. It is a good solution for high heat applications. This product meets various automotive specifications.
Product color range	Black
ASTM D 1056 Designation	2A1
Cell structure	Closed
Form	Bun
Polymer	100% EPDM
Markets	Automotive
Applications	Gaskets and seals

Source	Specification	Comments
Approvals and specifications		
General Motors	GMW 17408 Class I Type IV	Interior & Exterior Applications Exception to compression set @ 70°C (158°F) & fogging
Stellantis (FCA / Chrysler)	MSAY 430 MS.90145 Type 2	
MAHLE	GN AR 06220 Par 6.10	Previously Delphi SD2-207 Par 6.10

Property	Value / Assessment	Standard / Test method
Operating temperature		
Operating temperature	Min: -75°C (-103°F) Max (intermittent): 121°C (250°F) Max: 104°C (220°F)	
Flammability		
Flame FMVSS 302 (burn rate)	3.94 in/minute (100 mm/minute) max Passes at 0.188 in (4.76 mm) and higher	FMVSS 302
Resistance to water		
Water absorption by vacuum	10% max	ASTM D1056
Physical attributes		
Density	3 - 5 lb/ft ³ 48.1 - 80.1 kg/m ³	ASTM D1056
Mechanical properties		
Compression set	45% max	ASTM D1056
Tensile strength	40 psi min 276 kPa min	ASTM D412 (Die A)
Elongation	150% min	ASTM D412 (Die A)
Tear strength	6 lb/in min 1.05 kN/m min	ASTM D624 (Die C)
Hardness durometer shore 00	30 - 50	ASTM D2240
Compression deflection		
Compression deflection 25%	2 - 5 psi 13.8 - 34.5 kPa	ASTM D1056

Property	Value / Assessment	Standard / Test method
Compression deflection 50% - 60 sec hold	6.96 - 14.07 psi 48.01 - 97 kPa	ISO 3386-1
Change in compression deflection	±30 %	ASTM D1056

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

© Armacell, 2026. All rights reserved. Trademarks followed by © or TM are trademarks of the Armacell Group.

ArmaComp | Monarch 3091 | TDS | 022026 | en-US

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical insulation solutions that create sustainable value for its customers. Armacell's products significantly contribute to driving energy efficiency worldwide. With more than 3,100 employees and 26 production plants in 20 countries, Armacell operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

For more information, please visit:
www.armacell.com

